

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 998 134 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
03.05.2000 Bulletin 2000/18

(51) Int Cl.7: H04N 5/00

(21) Application number: 99308539.8

(22) Date of filing: 28.10.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Hamada, Ichiro, c/o Intellectual Property Depart.
Shinagawa-ku, Tokyo 141 (JP)
• Suzuki, Kenichi, c/o Intellectual Property Depart.
Shinagawa-ku, Tokyo 141 (JP)
• Kato, Toshio, c/o Sony Ichinomiya Corporation
Aichi-Ken (JP)

(30) Priority: 30.10.1998 JP 31117798

(71) Applicant: SONY CORPORATION
Tokyo 141 (JP)

(74) Representative: Pratt, Richard Wilson et al
D. Young & Co,
21 New Fetter Lane
London EC4A 1DA (GB)

(54) Receiver and receiving-decoding method

(57) A receiver has a simple configuration for receiving and decoding digital broadcasts and outputting decoded data to an external device and moreover, decoding externally-input data and outputting decoded data to an external device. The receiver includes a received-data demodulating means (10) for receiving and demodulating digital broadcast and generating a first clock in accordance with the digital broadcast and a clock generating means (30) for generating a third clock by frequency-dividing a predetermined second clock. The first clock is used when the digital broadcast is received and decoded and the third clock is used when externally-input data is decoded.

ulating digital broadcast and generating a first clock in accordance with the digital broadcast and a clock generating means (30) for generating a third clock by frequency-dividing a predetermined second clock. The first clock is used when the digital broadcast is received and decoded and the third clock is used when externally-input data is decoded.

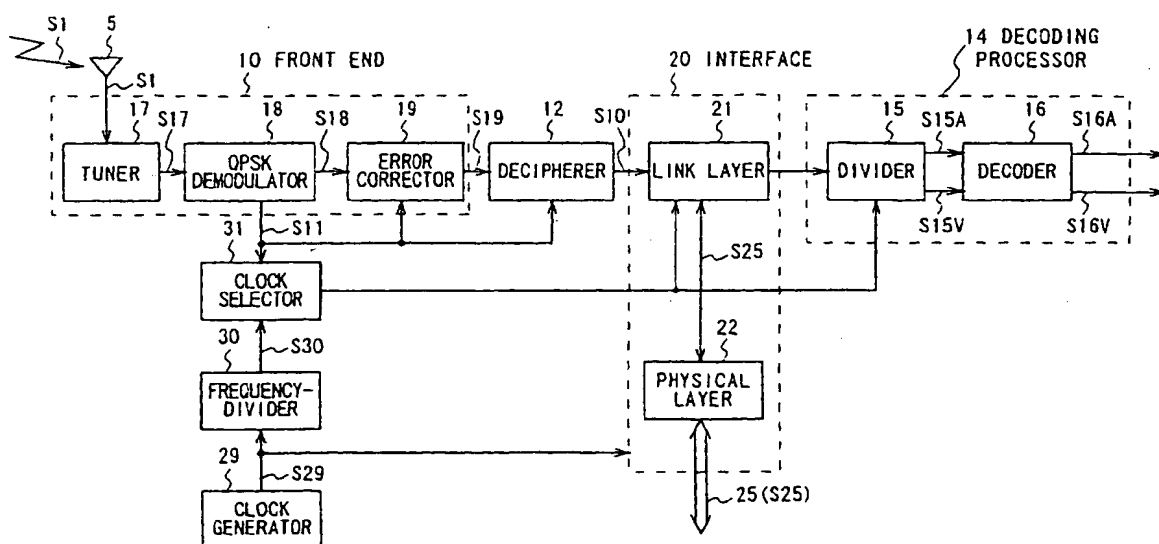


FIG. 2

Description

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

[0001] This invention relates to a receiver and a receiving-decoding method. An embodiment of the invention relates to a receiver for receiving, for example, digital television broadcasts and outputting an obtained transport stream to an external device and also inputting a transport stream from an external device and decoding it.

DESCRIPTION OF THE RELATED ART

[0002] Digital television broadcasting has already started whereby a video signal is digitalized in accordance with the compressing encoding method such as the moving picture experts group phase 2 (MPEG 2) method and broadcasts it on ground waves or satellite waves.

[0003] In such digital television broadcasting, the audience needs a digital-broadcast receiver-decoder referred to as an integrated receiver decoder (IRD) which receives and decodes the ground waves and satellite waves.

[0004] In Fig. 1, 1 denotes a digital-broadcast receiver-decoder as a whole and an antenna 5 receives broadcast radio waves S1 and supplies it to a front end 10. The front end 10 demodulates the broadcast radio waves S1, generates a transport stream S10 composed of successive transport stream (TS) packets, and outputs the stream S10 to a decipherer 12. The decipherer 12 decipheres each enciphered TS packet in the case when each TS packet is enciphered and supplies it to a divider 15.

[0005] The divider 15 extracts desired TS packets from the transport stream S10, divides them into audio TS packets and video TS packets and supplies them to a decoder 16. The decoder 16 decodes the audio TS packets S15A and the video TS packets S15V supplied from the divider 15 in accordance with the MPEG 2 method, and outputs them as an audio signal S16A and a video signal S16V to an external device.

[0006] In this case, the front end 10 generates a byte clock S11 synchronous with the transport stream S10 when the transport stream S10 is generated by demodulating the broadcast waves Si and outputs the byte clock S11 to the decipherer 12 and the divider 15. The byte clock S11 is a sync signal for synchronizing and transferring data. The front end 10, decipherer 12, and divider 15 operate in accordance with the byte clock S11 and thereby transfer TS packets composing the transport stream S10 synchronously with the byte clock S11.

[0007] In this kind of digital-broadcast receiver-decoder, it is possible to use a high-speed digital data interface such as an institute of electrical and electronics

engineers (IEEE) 1394, output and store a transport stream obtained by receiving broadcast radio waves into a digital recorder such as an externally-set digital video tape recorder (VTR) via the digital data interface, and also input and decode the transport stream stored in the digital recorder via the digital data interface.

[0008] However, when a transport stream is inputted via the digital data interface, it is possible that the byte clock of a digital-broadcast receiver decoder (that is, the byte clock of a transport stream obtained by receiving broadcast waves) would not coincide with the byte clock of a transport stream inputted via the digital data interface, that is, data transfer rates would not coincide with each other. Moreover, when the byte clock of the transport stream inputted via the digital data interface is faster than that of the digital-broadcast receiver-decoder, a problem occurs that some of the TS packets are not transferred from the digital-broadcast receiver-decoder, which could lead into a decoding trouble.

[0009] Furthermore, there can be a case in which digital broadcasts are not received when inputting a transport stream from the digital data interface. In which case, the front end 10 cannot generate a byte clock, which can be an obstacle to the operation of the digital-broadcast receiver-decoder.

SUMMARY OF THE INVENTION

[0010] An embodiment of this invention seeks to provide a receiver and a receiving-decoding method having a simple configuration to receive digital broadcasts, and output the obtained transport stream to an external device, and also to decode a transport stream inputted from the external device.

[0011] One aspect of the invention provides a receiver which comprises: a receiving part for receiving and demodulating the digital broadcasts to output the first transport stream; a digital interface for receiving the second transport stream supplied from an external device; and a decoding processor for decoding the first transport stream received in the receiving part or the second transport stream received in the digital interface. The decoding processor changes clocks for transferring a transport stream depending on which to decode a first transport stream or a second transport stream.

[0012] Another aspect of the present invention provides a receiving-decoding method for receiving digital broadcasts comprising the steps of: receiving and demodulating the digital broadcasts in the receiving part so as to output a first transport stream; receiving a second transport stream supplied from an external device in a digital interface; transferring to a decoding processor and decoding the first transport stream received in the receiving part or the second transport stream received in the digital interface; and changing clocks used for transferring the transport stream depending on which to decode the first transport stream or second transport stream in the decoding processor.

[0013] Because a clock corresponding to the transfer rate of a transport stream to be decoded is selected, it is possible to decode all data strings without fail.

[0014] Moreover, because the third clock used to transfer the second transport stream is generated by frequency-dividing a second clock necessary for the operation of the digital interface, the configuration is simplified without separately using a clock generating circuit.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] A better understanding of the invention will become apparent from the following illustrative description when read in conjunction with the accompanying drawings in which:

Fig. 1 is a block diagram showing the configuration of a digital-broadcast receiver-decoder;

Fig. 2 is a block diagram showing the configuration of an embodiment of a digital-broadcast receiver decoder of the present invention; and

Figs. 3A to 3D are timing charts showing the transfer timing of TS packets.

DETAILED DESCRIPTION OF THE EMBODIMENT

[0016] In Fig. 2 in which counterparts of Fig. 1 are provided with the same symbols, 2 denotes a digital-broadcast receiver-decoder as a whole, which operates in either broadcast receiving-decoding mode or external-input decoding mode in accordance with the control by a non-illustrated controller. The digital-broadcast receiver-decoder 2 receives broadcast radio waves S1 to demodulate a transport stream S10 in the broadcast receiving-decoding mode and then decodes the demodulated transport stream S10 into an audio signal S16A and a video signal S16V which are outputted to an external device. On the other hand, in the external-input decoding mode, the digital-broadcast receiver-decoder 2 decodes a transport stream S25 inputted through an institute of electrical and electronic engineers (IEEE) 1394 bus 25 into an audio signal S16A and a video signal S16V, which are outputted to an external device.

[0017] That is, in the broadcast receiving-decoding mode, the digital-broadcast receiver-decoder 2 receives the broadcast waves S1 via a receiving antenna 5 and supplies the broadcast waves S1 to a front end 10 serving as a received data demodulating means. The tuner 17 of the front end 10 selects and amplifies a targeted channel included in the broadcast radio waves S1 and supplies the amplified channel to a quadrature phase shift keying (QPSK) demodulator 18 as a received signal S17. The QPSK demodulator 18 demodulates the received signal S17 in accordance with the QPSK method, and supplies a demodulated signal S18 to an error corrector 19. And the QPSK demodulator 18 generates a byte clock S11 and supplies it to the error corrector 19, decipherer 12, and clock selector 31 serving as a

clock selecting means.

[0018] The error corrector 19 applies predetermined error correction to the signal S18 from the QPSK demodulator 18 to output the signal S19 to the decipherer 12. The decipherer 12 decipheres the signal S19 supplied from the error corrector 19 in the case which it is deciphered, and outputs the transport stream S10 to an interface 20. In this case, the QPSK demodulator 18, error corrector 19, and decipherer 12 operate in accordance with the byte clock S11, which makes TS packets composing the transport stream S10 transferred synchronously with the byte clock S11.

[0019] The interface 20 serves as a digital data interface based on the IEEE1394 standard, which is composed of a physical layer 22 for exchanging data with other IEEE1394 interfaces (not illustrated) connected to the IEEE1394 bus 25 and a link layer 21 serving as data selecting means connected to the physical layer 22 to switch input and output of data. The link layer 21 has a buffer (not illustrated) for temporarily storing data.

[0020] The link layer 21 of the interface 20 directly supplies the TS packets of the transport stream S10 to the divider 15 of a decoding processor 14 and simultaneously outputs them to a digital recorder (such as a digital VTR) connected to the IEEE1394 bus 25 via the physical layer 22.

[0021] The divider 15 extracts desired TS packets from the transport stream S10 and divides them into audio TS packets S15A and video TS packets S15V which are supplied to the decoder 16. The decoder 16 decodes the audio TS packets S15A and the video TS packets S15V supplied from the divider 15 into an audio signal S16A and a video signal S16V in accordance with the MPEG2 method, which are outputted to an external device.

[0022] In this case, the clock selector 31 selects the byte clock S11 supplied from the QPSK demodulator 18 in the broadcast receiving-decoding mode and supplies it to the link layer 21 and divider 15. The decipherer 12, link layer 21, and divider 15 operate in accordance with the byte clock S11. This makes TS packets composing the transport stream S10 transferred synchronously with the byte clock S11.

[0023] Thus, the digital-broadcast receiver-decoder 2 receives the broadcast radio waves S1 and demodulates the transport stream S10 in the broadcast receiving-decoding mode and moreover, decodes the stream S10 into an audio signal S16A and a video signal S16V which are outputted to an external device. Also, when outputting the transport stream obtained from the received digital-broadcast via the interface to the external device, it is transferred from the decipherer 12 to the link layer 21 in accordance with the byte clock generated in the QPSK demodulator 18.

[0024] On the other hand, in the external-input decoding mode, the digital broadcast receiver-decoder 2 inputs the transport stream S25 supplied from a digital recorder (such as a digital VTR) connected to the

IEEE1394 bus 25 to the interface 20. In this case, the transport stream S25 is supplied in the form of packets based on the IEEE1394 standard.

[0025] The physical layer 22 supplies the transport stream S25 inputted via the IEEE1394 bus 25 to the link layer 21. Then, the link layer 21 converts the transport stream S25 from packets of the IEEE1394 standard into TS packets and supplies them to the divider 15. The divider 15 divides the transport stream S25 into audio TS packets 15A and video TS packets 15V and supplies them to the decoder 16. The decoder 16 decodes the audio TS packets S15A and video TS packets S15V supplied from the divider 15 into an audio signal S16A and a video signal S16V in accordance with the MPEG2 method which are outputted to an external device.

[0026] Here, a system clock S29 is supplied to the interface 20 from a clock generator 29. The system clock S29 is a clock serving as the operation criterion of the whole interface 20. A frequency divider 30 frequency-divides the system clock S29 at a predetermined frequency-division rate and supplies it to the clock selector 31 as a byte clock S30. In the external-input decoding mode, the clock selector 31 selects the byte clock S30 supplied from the frequency divider 30 and supplies it to the link layer 21 and divider 15. Then, the link layer 21 and divider 15 operate in accordance with the byte clock S30. This makes TS packets composing the transport stream S25 transferred synchronously.

[0027] Thus, in the external-input decoding mode, the digital-broadcast receiver-decoder 2 decodes the transport stream S25 inputted via the IEEE1394 bus 25 into an audio signal S16A and a video signal S16V which are outputted to an external device.

[0028] Figs. 3A to 3D show the relation between byte clock and TS-packet-transfer timing. Fig. 3A shows a byte clock for specifying the sync timing of each block for transmitting and receiving TS packets.

[0029] At the side of transmitting the TS packets, the TS start signal shown in Fig. 3B becomes logical "H" level during one clock when starting to transfer TS packages. At the same time, the TS enable signal shown in Fig. 3C becomes logical "H" level. The TS enable signal shows that a TS packet to be transferred is valid. At this timing, the TS packet shown in Fig. 3D is successively transferred synchronously with a byte clock.

[0030] The receiving side of the TS packets successively takes in TS packets synchronously with a byte clock while a TS enable signal has logical "H" level. Thus, TS packets are transferred between the transmitting side and the receiving side. When transfer of one packet (188 bytes) is completed, the TS enable signal becomes logical "L" level and transfer of one packet is completed.

[0031] In this connection, it is estimated that a byte clock of approximately 6MHz is enough for a transport stream of a general digital television broadcast. Moreover, because the supply source of transport stream recorded in digital recorder such as a digital VTR would

be a digital television broadcast, it could also be estimated that the byte clock of the transport stream S25 inputted via the IEEE1394 bus 25 is to be approximately 6MHz.

[0032] Therefore, by setting the clock frequency of the byte clock S30 to 6MHz or higher, it would be possible to prevent transfer fault of some transport streams S25. Because the system clock S29 of the IEEE1394 uses 50MHz, it is possible to prevent transfer fault of some transport streams S25 by dividing the frequency of the system clock S29 by 8 to generate a clock of 6.25MHz and using it as the byte clock S30.

[0033] In the above configuration, when broadcast radio waves are received and decoded, the digital-broadcast receiver-decoder 2 operates in the broadcast receiving-decoding mode.

[0034] That is, the digital-broadcast receiver-decoder 2 receives the broadcast radio waves S1 through the antenna 5, demodulates it by the front end 10 and deciphers ciphers in the decipherer 12 to generate the transport stream S10, and supplies it to the decoding processor 14 via the link layer 21. Then, the decoding processor 14 decodes the transport stream S10 into an audio signal S16A and a video signal S16V which are outputted to an external device.

[0035] In this case, the digital-broadcast receiver-decoder 2 operates in accordance with the byte clock S11 generated in the QPSK demodulator 18 and serving as a clock synchronizing with the transport stream S10, and synchronously transfers TS packets composing the transport stream S10.

[0036] On the other hand, when an externally-inputted transport stream is decoded, the digital-broadcast receiver-decoder 2 operates in the external-input decoding mode.

[0037] That is, the digital-broadcast receiver-decoder 2 inputs the transport stream S25 supplied from digital recorder connected to the IEEE1394 bus 25 to the interface 20 and to the decoding processor 14 via the link layer 21. Then, the decoding processor 14 decodes the transport stream S25 into an audio signal S16A and a video signal S16V which are outputted to an external device.

[0038] In this case, the digital-broadcast receiver-decoder 2 does not use a clock synchronous with the transport stream S25 but it generates a clock transferable at a rate faster than an assumed maximum transfer rate of the transport stream S25 inputted via the interface 20 by frequency-dividing the system clock S29. Then, the digital-broadcast receiver-decoder 2 operates in accordance with the byte clock S30 generated by frequency-dividing the system clock S29 and synchronously transfers TS packets composing the transport stream S25.

[0039] According to the above configuration, it is possible to prevent transfer fault of some TS packets by generating the byte clock S11 synchronous with the transport stream S10 in the front end 10, using the fre-

quency divider 30 for frequency-dividing the system clock S29 to generate the byte clock S30 and the clock selector 31 for selecting and supplying the byte clocks S11 and S30, and selecting the byte clock S11 when receiving and decoding broadcast radio waves or selecting the byte clock S30 when decoding a transport stream inputted from an external device. Besides, the clock generator 29 is an essential component in the case of digital data interface being provided. The system clock 29 generated by the clock generator 29 is frequency-divided so as to generate a byte clock. This only requires the frequency-divider 30 and the clock selector 31 for additional circuits, and minimizes the necessity for extra circuits.

[0040] In the above embodiment, the byte clock S30 is generated by frequency-dividing the system clock S29 serving as the operation criterion of the whole interface 20. However, the present embodiment is not restricted to the above case. It is also permitted to generate the byte clock S30 by frequency-dividing various clocks of the digital-broadcast receiver-decoder 2.

[0041] Moreover, in the above embodiment, a clock of 6.25MHz is generated by frequency-dividing the system clock S29 by 8 and uses the clock as the byte clock S30. However, the present embodiment is not restricted to the above case. It is also permitted to frequency-divide clocks having various frequencies in accordance with the assumed byte clock externally-inputted.

[0042] As described above, a digital interface is provided in a digital-broadcast receiver-decoder, and a byte clock generated in accordance with digital broadcast is used when the digital broadcast is received and decoded, and a byte clock which is generated by frequency-dividing an existing system clock is used when a transport stream supplied from the digital interface is inputted and decoded. Therefore, it is possible to prevent transfer fault of some data with a simple configuration.

[0043] It will be apparent to those skilled in the art that various changes and modifications may be made to the embodiment described above. All such changes and modifications fall within the true spirit and scope of the invention.

Claims

1. A receiver for receiving digital broadcasts comprising:

a receiving part for receiving and demodulating said digital broadcasts to output a first transport stream;
a digital interface for receiving said second transport stream supplied from an external device; and
a decoding processor for decoding said first transport stream received in said receiving part or said second transport stream received in

said digital interface, in which
said decoding processor changes clocks for transferring a transport stream depending on which to decode said first transport stream or said second transport stream.

2. The receiver according to claim 1, wherein:

said receiving part is composed in order to generate a first clock for transferring said first transport stream; and
when said first transport stream is decoded in said decoding processor, said first transport stream is transferred with said first clock generated by said receiving part.

3. The receiver according to claim 2, wherein:
said receiving part comprising:

a tuner for selecting frequency of receiving signal;
a demodulator for demodulating a signal received by said tuner;
an error corrector for correcting errors of signals demodulated by said demodulator; and
said first clock is generated by said demodulator.

4. The receiver according to claim 1, wherein:

said digital interface is composed in order to generate a second clock necessary for further operation of said digital interface; and
when said decoding processor decodes said second transport stream, said second transport stream is transferred with a third clock obtained by frequency-dividing said second clock generated by said digital interface.

5. The receiver according to claim 4, wherein
said third clock is generated by frequency-dividing said second clock in order to be transferred at a rate faster than an assumed transfer rate of transport streams inputted via said digital interface.

6. A receiving-decoding method for receiving digital broadcasts comprising the steps of:

receiving and demodulating said digital broadcasts in said receiving part so as to output a first transport stream;
receiving a second transport stream supplied from an external device in a digital interface;
transferring to a decoding processor and decoding said first transport stream received in said receiving part or said second transport stream received in said digital interface; and
changing clocks used for transferring said

transport stream depending on which to decode said first transport stream or second transport stream in said decoding processor.

7. The receiving-decoding method according to claim 6, wherein:

a first clock to transfer said first transport stream is generated in said receiving part; and said first transport stream is transferred with said first clock generated by said receiving part when said first transport stream is decoded in said decoding processor.

8. The receiving-decoding method according to claim 7, wherein:

said receiving part has the configuration to select the frequency of a received signal, demodulate a signal transmitted at a selected frequency and correct errors of said demodulated signal; and said first clock is generated at the time of said demodulation.

9. The receiving-decoding method according to claim 6, wherein:

a second clock necessary for the operation of said digital interface is generated in said digital interface; and when a second transport stream is decoded in said decoding processor, said second transport stream is transferred with a third clock obtained by dividing said second clock generated by said digital interface.

10. The receiving-decoding method according to claim 9, wherein

said third clock is generated by frequency-dividing said second clock in order to be transferred at a rate faster than an assumed transfer rate of transport streams inputted via said digital interface.

45

50

55

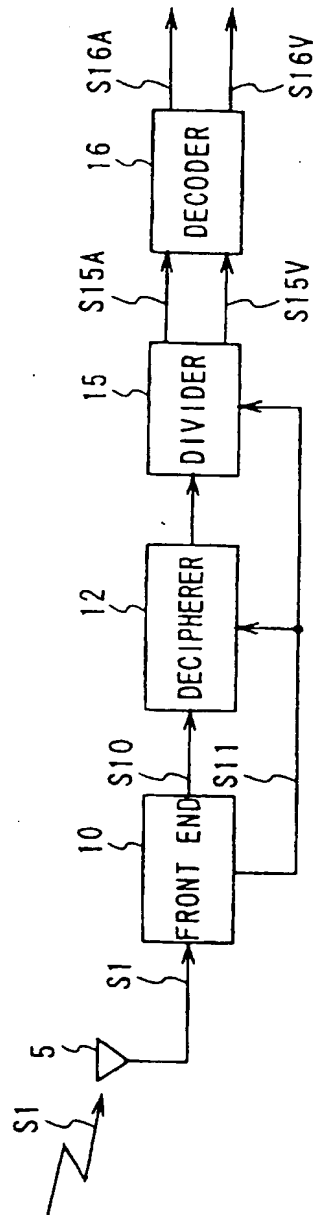


FIG. 1(PRIOR ART)

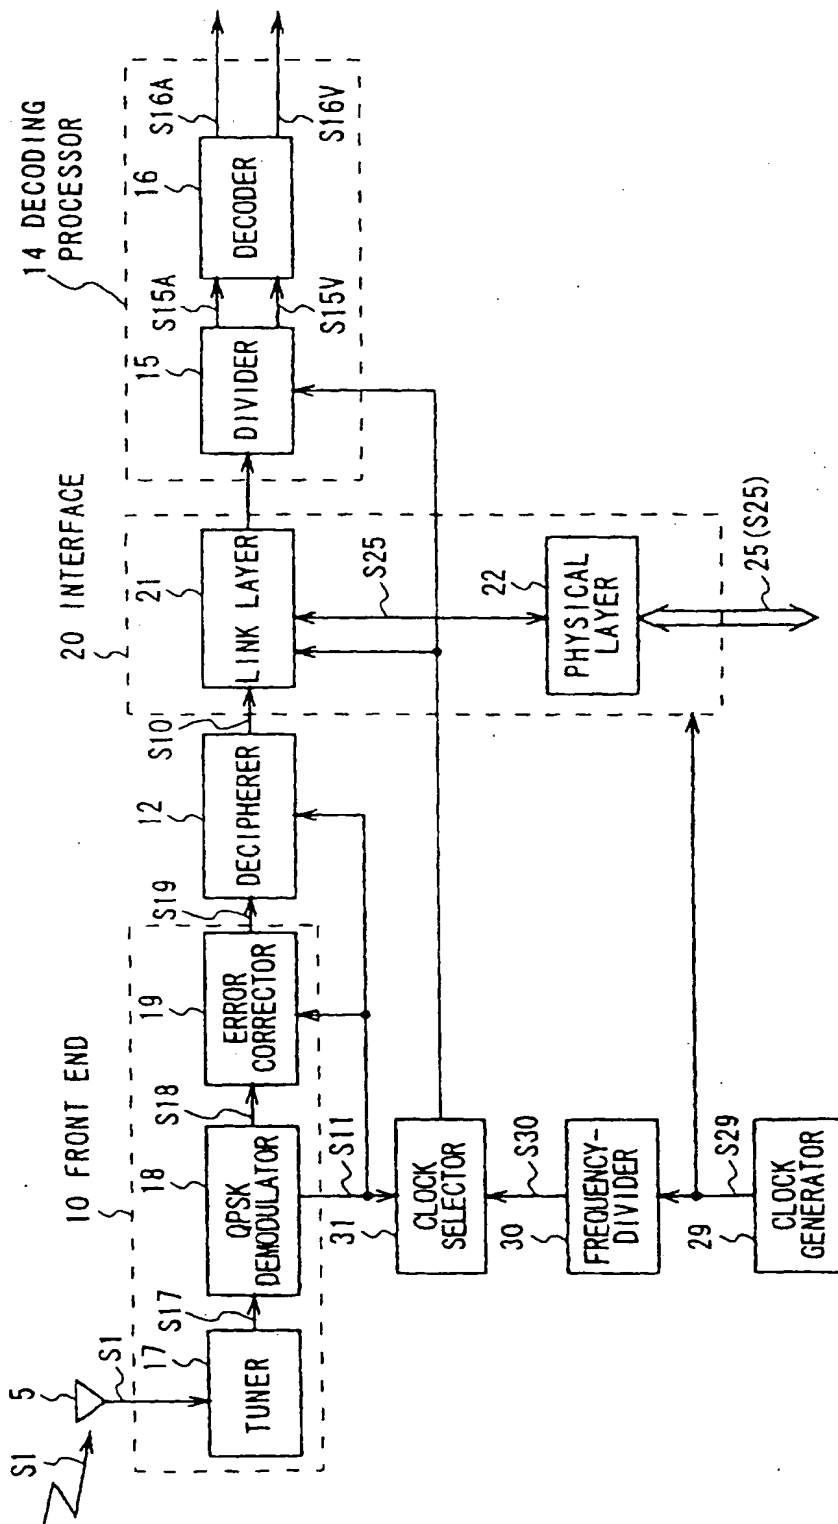
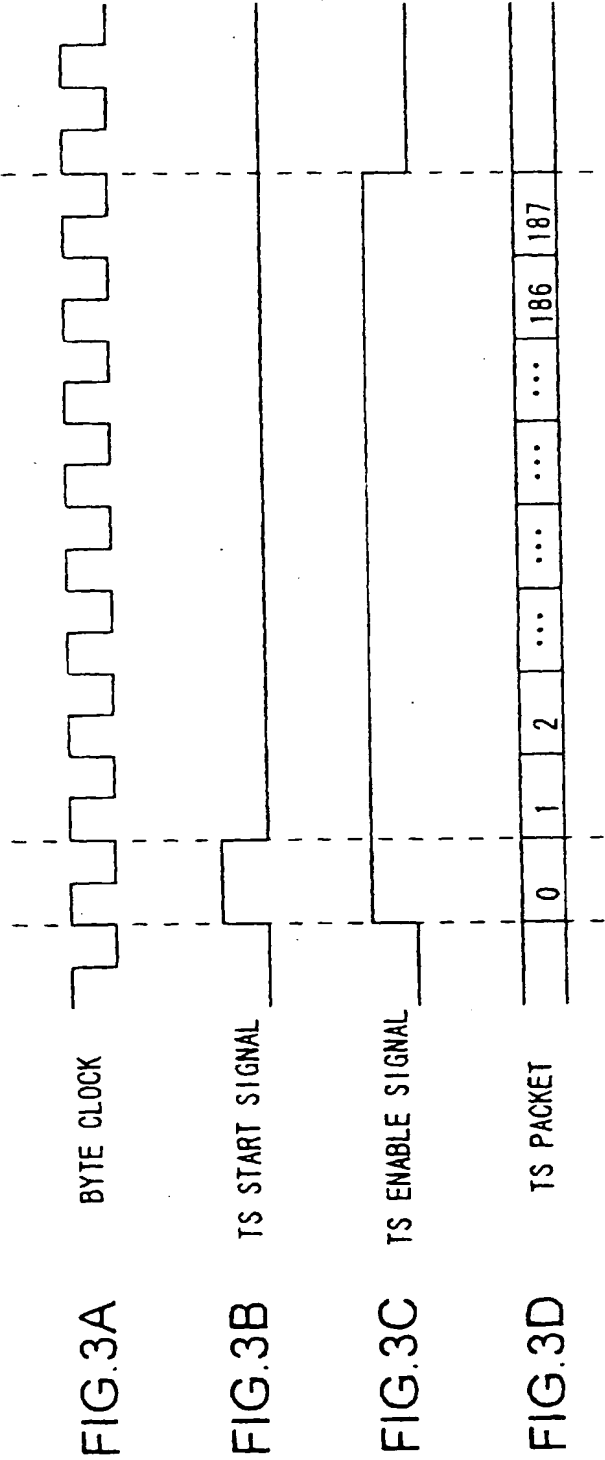


FIG. 2



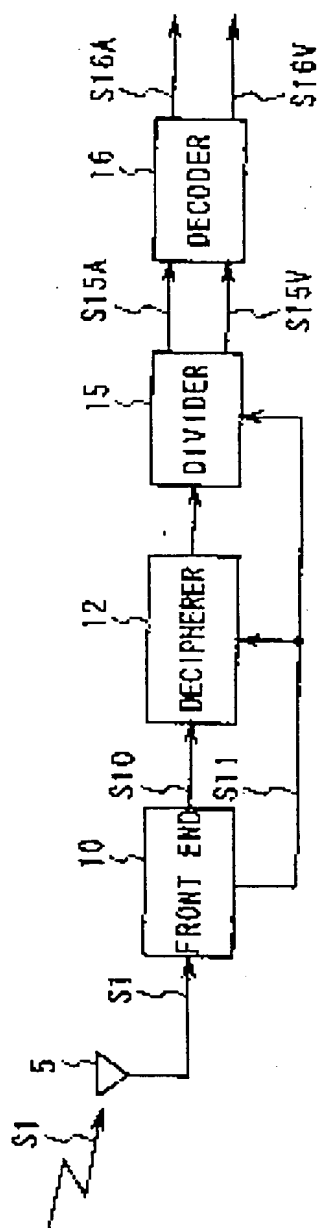


FIG. 1(PRIOR ART)


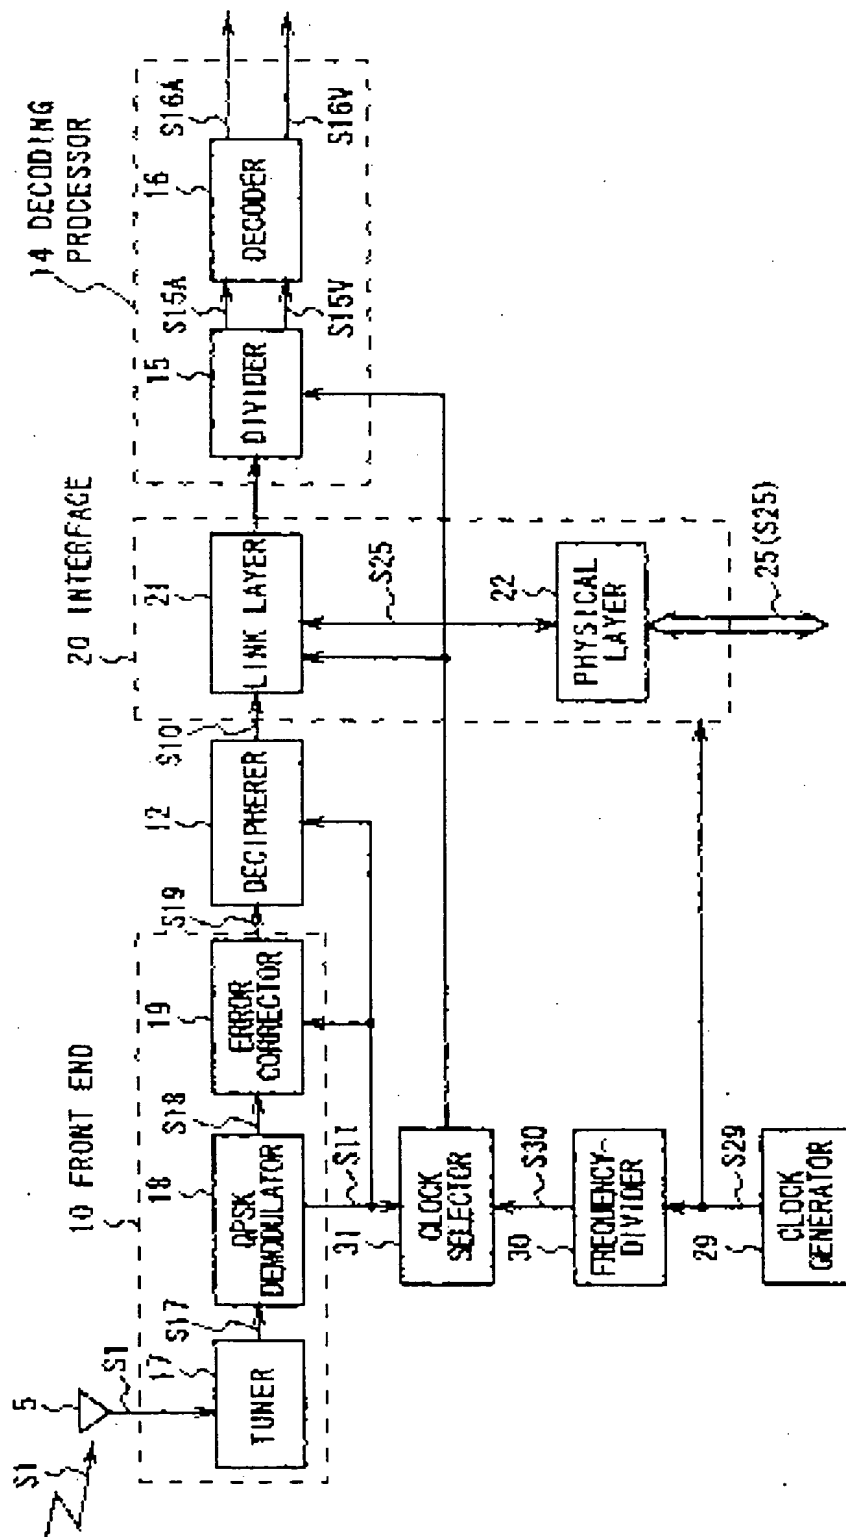


FIG. 2

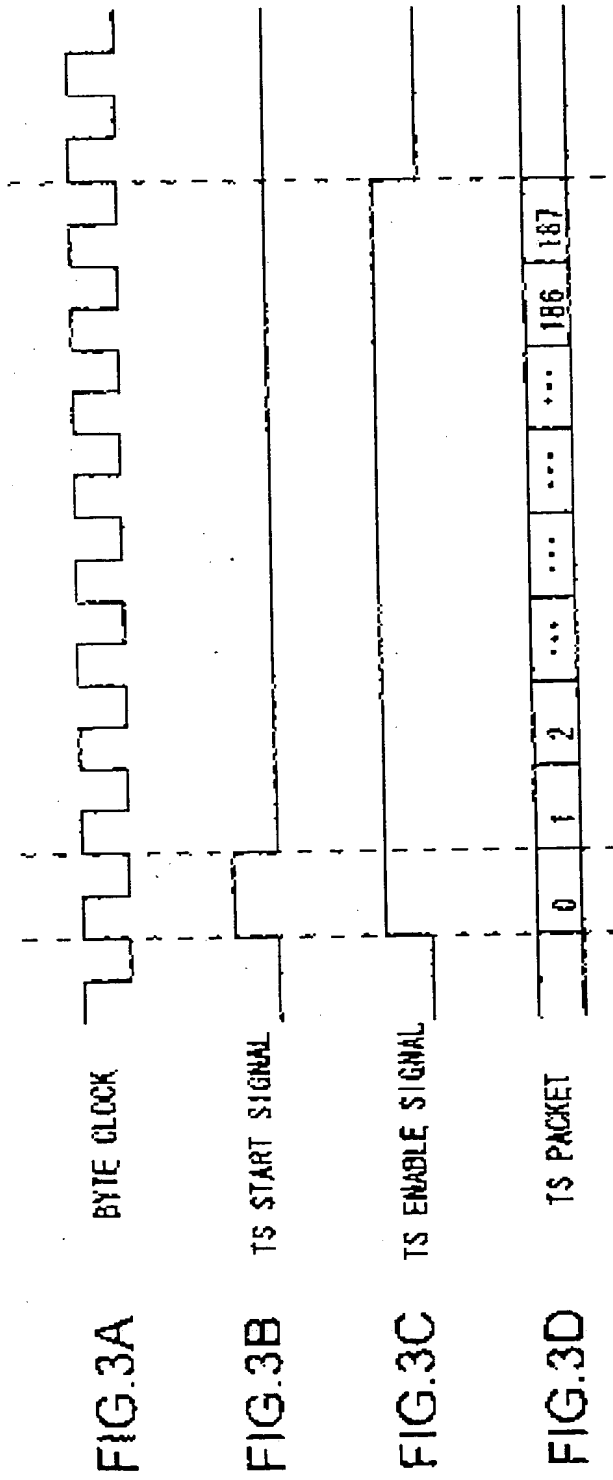

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.